Analysis of Seasonal variation in ionic composition, groundwater quality classification for drinking and irrigation in and around Sandur Taluka, Bellary District, India

D. M. Thotappaiah¹ and T. Suresh¹

¹Department of Chemistry, Vijayanagara Sri Krishnadevaraya University, Bellary-583104, Karnataka, India Email: <u>durgadamat@gmail.com</u> : <u>proftsuresh@gmail.com</u>

Abstract

Declining in the groundwater quality and increasing in the anthropogenic activities at an alarming rate in parts of the Karnataka, especially in Bellary district Sandur area. A limited work has been carried out on groundwater quality classification for drinking and irrigation in selected locations. In the present paper highlights the groundwater quality and compares its suitability for drinking and irrigation purpose in Sandur area Bellary region, a north part of Karnataka. Fifty ground water samples representing underground sources were collected and analyzed for almost all major cations, anions and other physicochemical parameters. Analytical results of physicochemical analysis showed majority of the samples above the permissible limits of the Indian standards. The groundwater of the study area was very hard and the relative abundance of major cations and anions was Ca2+>Mg2+>Na+>K+ during Winter season, Ca2+> Na+>Mg2+ >K+ during Summer and Rainy Seasons and Cl->HCO3>SO42- during the entire study period respectively. Overall the analytical data illustrates that except few ground water samples; most of the groundwater samples fall in excellent and good categories and can be used for irrigation. The parameters like sodium adsorption ratio and sodium percentage (Na%) revealed good quality of groundwater for irrigation purposes, whereas magnesium ratio values showed that water is not suitable for agriculture and domestic use. This work thus concludes that groundwater in the study area is chemically unsuitable for domestic and agricultural uses. It is recommended to carry out a continuous water quality monitoring program and development of effective management practices for utilization of water resources.

Keywords: seasonal, agriculture, SAR, percentage of Na, magnesium ratio.

1. INTRODUCTION

Water, one of the most vital resources, is essential to sustain life. Based on the fundamental quality, water is used in different sectors viz. domestic, agriculture, power and industry. Therefore, one should have some basic information on quantity and quality of water resources for its proper usage and management. In the surface of the Earth water covers about 70%, all the living organism are depending upon the resource for the natural a biotic resources. Water is the basis of life; it makes up to 75-95% of the total weight of any functioning living cell. However, due to rapid industrialization and increasing human

population, the stress on natural resources is increasing and their conservation is one of the major challenges for mankind (Tajinder Kaur, et al., 2017).

Water is a fundamental resource for most of the living things, epically ground water is for human community for both drinking and irrigation. The quality of groundwater is as important as its quantity because it is the major factor in determining its suitability for drinking, domestic, irrigation and industrial purposes. The concentration of chemical constituents which is greatly inclined by geological formations and anthropogenic activities have resulted in deterioration of water quality rendering serious threats to human beings (Suresh, et al., 2011).

Once contamination of groundwater in aquifers occurs by means of industrial activities and urban development, it persists for hundreds of years because of very slow movement of water in them (Jerry 1986) and prompts investigations on their quality. The quality of groundwater cannot be restored once it is contaminated. Cations and anions occur naturally in groundwater and gives the composition of minerals present in water. Especially, the urban aquifers are the only natural resource for drinking water supply, they are often professed as of minor relevance for the drinking water supply, leading to crisis in terms of drinking water scarcity, becoming increasingly polluted thereby decreasing their permissibility (Tiwari, et al., 2012). The knowledge of ionic (cations and anion) composition is important to understand the ground water quality in any region in which the ground water is used for both irrigation and drinking needs (Srinivas, et al., 2013).

Assessment of ground water quality determines the subsurface geological environment in which the water present also called ground water layer in earth crust. The conventional techniques such as trilinear plots, statistical techniques are widely accepted methods to determine the quality of water. In the present study, an attempt is made towards to evaluate the chemical and ionic composition characteristics pf ground water quality and major parts of Sandur area, Bellary region with dense human activities like agricultural and mining activities. The analytical and interpreted results of the study will be useful in the sustainable management of groundwater resources in the region..

2. MATERIALS AND METHODS

2.1 Study area

The present study is carried out at Sandur area of Bellary district, Karnataka which is geographically bounded by 15° 10' and 15°50' north latitude and 76° 55' and 76° 61' east longitude covering an area of above 565 meters (Figure 1). Sandur and its surrounding village's places of natural beauty with lush green mountains, valleys, deep gorges and most of the villages are depending upon the ground water for their daily needs. The Sandur town located to the south of Hosapete. It located on the southern edge of the original Vijayanagara metropolitan area. Sanduru Taluk has deposits of manganese ore and hematite (iron ore), and is home to several mines and steel plants in and around the taluka. Study area receives 750mm of elevation but has seen more than 1000mm of rainfall. As per 2011 census the population of the study area is 37,431. The details longitude and latitude of the selected ground water locations are given in Table 1.

2.2 Methodology

To study the quality in and around the Sandur region, total number of 50 groundwater samples were collected imperviously soaked in 10 % nitric acid (HNO3) for 24 hand rinsed with deionized water 5L colored polythene cans from different locations for the period of two years from March 2015 to February 2017. Before collecting the ground water samples, the ground water was pumped out from bore wells for about 15minutes to remove stagnant groundwater. All the ground water samples were transported to laboratory and kept for 40C until used for further analysis. The physicochemical parameters have been analyzed by volumetric like total hardness, calcium and chloride (APHA, 2005). Cation and anions are measured as per the methodology available in the literature and followed the guidelines and methodology.

3. Results and Discussion

Assessment of chemical and ionic characteristics of ground water is essential for the suitability of water for drinking, agricultural, industrial and household uses. The summary of the analytical results and the mathematical variables such as minimum, maximum, mean and standard deviation is given in Table 2 for March 2015 and February 2017. Standards have been laid down by various agencies (BIS, 1992) for drinking water quality and agricultural purposes. The results of the chemical and ionic variables of ground water samples are shown in table 2.

In the present study reveals that, the soil texture in the study area was predominantly calcareous which may be the possible reason of hardness in water. The occurrence the major cations and anions in winter, summer and rainy seasons is depicted in Figure 2. Kumar, et al., (2007) worked on sodium as the most dominant cation in the Muktsar district of Punjab, India. In the present study, the average sodium content got third rank (8.2%) during winter season and in other two seasons summer (26.04%) and Rainy (22.24%) got second rank and was found to be 150.01mg/L, 106.3mg/L in summer and rainy seasons ground water samples which was more as compared to winter samples with an average value of 45.89 mg/L. Present study reveals that, the agricultural activities may be the key indication of increasing potassium content in groundwater (Sayyed and Bhosle 2011).

Both sodium and potassium does not have any prescribed limits for drinking water but the high levels of sodium in drinking water makes it salty in nature. During summer and winter seasons, 95 % of ground water samples were found to exceed the permissible limit of Ca2+ for drinking water (200 mg/L). In rainy season, the average value of calcium ion was 333.6 mg/L with maximum value of 1024.0 mg/L observed in sample S18 (S-Basapura, near bus stand). The average value of magnesium was 65.47 mg/L and 78.21 mg/L during summer season respectively, which were more as compared to the mean value (36.57 mg/L) in rainy. Average calcium cation found in our study were higher than those reported previously in Muktsar groundwater by Kumar et al. (2009) while mean Mg concentration were found to be lower in this study (Figure 2).

Chloride content was above the permissible limits with some 46.04 % and 53.59% samples in winter and summer samples during summer and rainy season showed higher concentration of chloride than desirable limit (250 mg/L) set by BIS for drinking water which may be due to the use of inorganic fertilizers and irrigation drainage. Total

alkalinity in water is mainly origin due to OH, CO3, HCO3 ions. Bicarbonate represents second dominant anion in the present study followed by sulfates. A similar results was also observed by Thakur, et al., (2016) in parts of Punjab which showed that HCO3 as the dominant anion in the region (Figure 2).

The highest concentration of sulfates (255.66 mg/L) was observed in summer ground water sample (S47,) collected from Vittalapura, besides Govt. School, Sandur area of Bellary district. High sulfate content may be due to breakdown of organic substances of weathered soils, anthropogenic activities, and use of fertilizers and sulfate leaching (Miller 1979). Maximum allowable limit of sulfate is 400 mg/L. It becomes unstable when this limit exceeds and leads to laxative effect on human system with excess of magnesium (Subramani, et al., 2005).

3.1 Water Quality for Irrigation

As the groundwater is being used for irrigation in Sandur taluk, Bellary district, it is necessary to determine the parameters responsible for irrigation water quality. The important parameters to know the quality of ground water for irrigation purposes are sodium absorption ratio (SAR), sodium percentage (Na%) and magnesium ratio (MR) (Tripathi, et al., 2012) are also calculated.

3.2 Sodium adsorption ratio (SAR):

SAR is a gives the hazards on crops by alkali/sodium (Subramani, et al., 2005). Excessive amount of sodium relative to Ca and Mg in water reduces the soil permeability in the agricultural land (Kumar, et al., 2007). The SAR values for each ground water

$$SAR = \frac{Na^{+}}{(Ca^{2+} + Mg^{2+})^{1/2}/2}$$

sample were calculated as: ¹² (All concentrations expressed in Meq/l) According to Richards (1954) classification SAR values ranges <10 Excellent, 10-18 are good, 18-26 are doubtful and >26 are unsuitable. From the present results it is concludes that except S19 (9.36 Meql) during summer season, all the collected ground water samples are found to be suitable for irrigation during the study period, and hence no alkali hazard is predictable to the crops in the study area (Krishna kumar, et al., 2015).

3.3 Sodium percentage (%Na):

Sodium concentration is depends upon the soil permeability since sodium dissolves in the soil and reduces the permeability. Hence in the study quality of ground water classify for the purposes of irrigation (Purushothman, et al., 2012). The clay particles of the soil will adsorbed the sodium content during the agricultural practices. Dispersion of sodium in the soil may changes the composition of Na+ and Mg2+ in water and replacing Ca from soil. The soil permeability decreases with poor internal drainage resulting in limited air and water circulation during wet conditions. When dry, such types of soils become hard (Saleh, et al., 1999 and Krishna kumar, et al., 2015). The classification ground water for irrigation purposes based on the sodium percentage as per the author Wilcox (1955)

and used the formulae to calculate sodium percentage is $\% Na = \frac{(Na^{+} + K^{+})x100}{Ca^{2+} + Mg^{2+} + Na^{+} + K^{+}}$ (All ionic concentrations expressed in meq/l). In the present study, According to Wilcox (1955) classification the percent sodium (%Na) ranges between < 20 is Excellent, 20 - 40 is good, 40 - 60 is Permissible and 60 - 80 is Doubtful. In the present study according to Wilcox that majority of the ground water samples were found to be good for irrigation (Table 2).

Seasonal observation during winter season (0.6%) of ground water samples are good category, during summer season (36%) falls under good category and (0.6%) fall under permissible category. During the rainy season (28%) of ground water falls under good category, (0.6%) of ground water falls permissible category but only one sample (Hosavaddanakatte) showing under Doubtful category (0.2%), may be because of interpretation of agricultural activities. Overall the analytical data illustrates that except few ground water samples; most of the groundwater samples fall in excellent and good categories and can be used for irrigation.

3.4 Magnesium ratio (MR):

.t.

Ground water can be classified for irrigation based on the magnesium ratio. if the magnesium ration is greater than 50% (Palliwal, 1972). It is expressed as: $MC = \frac{Mg^{2+}x 100}{MC}$

 $MG = \frac{Mg^{2+}x 100}{Ca^{2+} + Mg^{2+}}$ Generally, Ca and Mg are present in equilibrium in most of the waters. The quality of soil is affected adversely when magnesium content is high in water, resulting in alkaline nature of the soil and thereby reducing the crop yield (Kumar, et al., 2007 and Krishna kumar, et al., 2015). Based on MR, all most all the ground water samples and in the entire study samples were showing above the 50% magnesium ratio, hence samples were unsuitable for irrigation (Table 3).

Code	Village	Location	Latitude and Longitude	Code	Village	location	Latitude and Longitud
S1	Laxmipura	Outside village	15.10 Lati, 76.48 Longi	S26	Ankamnal	mallapur road	15.30 Lati, 76.55Longi
S2	Nandihalli	near school	15.11 Lati, 76.48 Longi	S27	D-Mallapura	Near tank	15.21 Lati, 76.58 Longi
S3	Tumati	Down the village	15.10 Lati, 76.48 Longi	S28	Hiralu	near pakkiradeyru temple	15.20 Lati, 76.61Longi
S4	Bujanganagara	Near bus station	15.11 Lati, 76.48 Longi	S29	Thippanamaradi	Near angannavadi	15.31 Lati, 76.60Longi
S5	Narasingapura	bus stop circle	15.10 Lati, 76.48 Longi	S30	Tyagadalu	village entrance	15.30 Lati, 76.42Longi
S6	RanaJIthpura	near school	15.12 Lati, 76.48 Longi	S31	Kalingeri	Choranur Roadside	15.42 Lati, 76.49Longi
S 7	Susheelanagara	Hospetroad side	15.10 Lati, 76.47 Longi	S32	Sovenahalli	near gramapanchyati	15.40 Lati, 76.51Longi
S8	Siddapura	near <u>devi</u> temple	15.12 Lati, 76.48 Longi	S33	Agrahara	near water tank	15.48Lati, 76.54Longi
S9	Jaisingpura	outside	15.12 Lati, 76.48 Longi	S34	Sulthanpura	Road side water tank	15.50Lati, 76.38Longi
S10	Venkatagin	near Anjaiani temple	15.12 Lati, 76.48 Longi	S35	Mallarahalli	road side	15.31 Lati, 76.39Longi
S11	Dowlatpura	near <u>masjid</u>	15.10 Lati, 76.50 Longi	\$36	S.Lakkalahalli	Roadside arriculture land	15.28Lati, 76.40 Longi
S12	D.Thimmalapura	Outside village	15.04 Lati, 76.49 Longi	S37	Genethikatte	chomur road side	15.24 Lati, 76.39 Longi
S13	Taranagara	near <u>halla</u>	15.12 Lati, 76.50 Longi	S38	Nallabande	near minwater tank	15.20Lati, 76.30 Longi
S14	Muraripura	Near Doni	15.11 Lati, 76.50 Longi	S39	Hosavaddanakatte	road side	15.18Lati, 76.32Longi
S15	V-Nagalpura	Behind the Govt. school	15.11 Lati, 76.50 Longi	S40	Choranuru	near water tank	15.12Lati, 76.20Longi
S16	Taluru	Govtschcool	15.11 Lati, 76.51 Longi	S41	Bommagatta	near hulikunteshwara temple	15.18Lati, 76.29Longi
S17	Chikkantapura	road side irrigation land	15.12 Lati, 76.53 Longi	S42	Bannihatti	near anganavadi	15.22Lati, 76.33 Longi
S18	S-Basapura	near bus stand	15.11 Lati, 76.52 Longi	S43	Lingadahalli	ubbalgundi road side	15.26Lati, 76.42 Longi
S19	Kurekuppa	Road side	15.11 Lati, 76.52 Longi	S44	Ubbalagundi	outside village	15.31 Lati, 76.32 Longi
S20	Dharmapura	Ashryaya colony	15.11 Lati, 76.52 Longi	S45	Rajapura	near chappardahalli	15.36Lati, 76.50Longi
S21	Yashavantanagara	kudligi road side	15.04 Lati, 76.49 Longi	S46	Metriki	near bus stand	15.44 Lati, 76.39 Longi
S22	Nidagurthi	beside the pond	15.03 Lati, 76.48 Longi	S47	Vittalapura	beside govt. school	15.42Lati, 76.38 Longi
S23	72-Mallapura	near Govt. school	15.03 Lati, 76.48 Longi	S48	Anthapura	Havinamadagu road	15.46Lati, 76.42Longi
S24	Katinakamba	near bus stand	15.02 Lati, 76.47 Longi	S49	Sandur	Shanbogar street	15.37Lati, 76.44Longi
S25	Bandri	inside yaşayi temple	15.02 Lati, 76.47 Longi	\$50	Kodalu	outside village	15.29Lati, 76.51Longi

Table 1: Physico-chemical	parameters of bore well	(BW) and hand	pump (HP)	of Sandur taluk, Bellary district
VVVVV80VVVVVV	Carbon second a subsection of the second		1 1 / /	

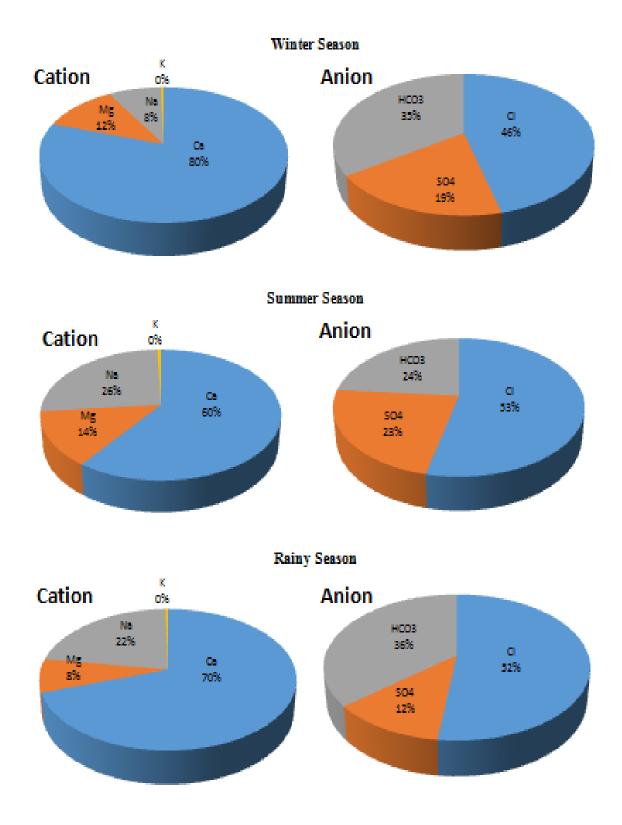


Figure 2. Pie diagram of mean values of major ions during the study period

0.1	Winter				Summe	er	Rainy			
Code	SAR	%Na	MR	SAR	%Na	MR	SAR	%Na	MR	
S 1	0.56	4.07	137.12	1.95	13.37	128.59	1.56	12.19	127.04	
S2	0.40	5.14	113.58	1.25	13.13	112.80	1.10	14.05	110.17	
S 3	0.51	6.40	112.82	1.67	17.73	111.18	1.44	18.30	109.07	
S4	0.39	4.42	115.87	1.29	12.85	113.44	1.09	12.86	111.74	
S5	0.56	4.67	128.06	2.00	15.73	122.64	1.56	13.83	120.35	
S 6	0.53	5.82	115.90	1.88	18.80	111.73	1.47	16.57	111.74	
S 7	0.40	4.13	120.34	1.38	12.93	114.72	1.11	11.95	114.87	
S 8	0.39	4.46	116.00	1.19	11.17	117.23	1.19	14.96	109.96	
S9	0.32	2.55	131.55	1.09	8.49	125.12	0.86	7.48	124.19	
S10	0.94	7.72	126.90	3.30	23.56	120.17	2.62	21.53	119.57	
S11	0.46	4.39	123.61	1.59	13.65	118.87	1.29	12.72	117.22	
S12	1.17	10.21	121.92	4.21	31.00	116.38	3.27	27.65	115.65	
S13	0.41	4.28	117.78	1.31	12.24	116.44	1.16	13.37	112.25	
S14	0.65	5.31	129.18	2.30	17.32	119.67	1.82	15.51	121.13	
S15	1.20	8.40	135.77	4.48	27.90	123.91	3.34	23.32	125.83	
S16	0.53	5.54	118.14	1.91	18.29	112.17	1.48	15.86	113.30	
S17	0.36	2.85	136.54	1.53	13.12	122.52	0.95	7.56	129.88	
S18	1.42	7.54	163.19	5.78	29.13	141.95	3.73	19.37	151.23	
S19	2.34	20.54	117.03	9.36	55.61	109.02	6.47	45.77	112.52	
S20	0.62	4.96	130.22	2.19	16.33	123.88	1.73	14.64	121.91	
S21	0.77	6.30	127.05	2.65	19.55	120.76	2.16	18.63	119.07	
S22	1.52	17.21	111.30	5.27	42.94	109.85	4.33	41.76	107.83	
S23	0.63	8.89	109.28	2.29	27.61	107.82	1.72	23.20	107.04	
S24	0.37	3.37	123.59	1.34	12.20	117.98	1.02	10.22	117.22	
S25	0.64	3.81	153.68	2.56	16.31	133.53	1.71	10.89	141.75	
S26	2.42	19.55	120.33	8.31	46.60	119.45	6.70	44.48	114.87	
S27	0.47	5.06	117.00	1.84	19.66	108.24	1.30	14.58	112.52	
S28	0.65	8.33	111.47	2.34	26.03	109.23	1.77	21.97	108.61	
S29	0.60	7.22	112.54	2.33	26.12	108.59	1.64	19.87	109.39	
S30	0.89	5.01	158.85	3.12	16.49	144.58	2.47	14.87	142.69	
S31	0.44	4.02	125.81	1.56	13.35	120.91	1.23	11.73	118.78	
S32	0.55	6.34	114.80	1.92	19.82	111.83	1.51	17.54	110.96	
S33	0.59	6.97	113.69	2.15	22.73	110.30	1.63	19.17	110.17	
S34	0.45	5.12	114.79	1.53	16.04	111.56	1.23	14.68	110.96	
S35	1.10	8.77	126.91	3.91	27.03	121.56	3.05	24.14	119.57	
S36	0.60	8.86	108.17	2.17	27.57	107.17	1.63	23.15	106.26	
S37	1.02	11.35	113.68	3.79	34.72	109.53	2.79	28.92	110.17	
S38	0.52	5.98	114.82	1.95	20.90	110.84	1.44	16.81	110.96	
S39	0.68	8.52	110.77	1.86	17.57	115.26	4.28	61.28	101.56	
S40	1.07	10.08	119.21	4.01	32.25	113.41	2.95	26.69	114.09	
S41	0.75	10.29	109.20	3.00	35.42	106.24	2.03	26.22	107.04	
S42	0.27	3.82	111.48	0.89	10.82	109.50	0.75	10.74	108.61	

S43	0.33	3.26	121.55	1.04	9.03	117.67	1.02	11.72	112.81
S44	0.38	4.26	115.91	1.28	13.16	112.60	1.05	12.44	111.74
S45	0.52	5.21	119.21	1.80	16.74	114.41	1.43	15.02	114.09
S46	1.15	7.63	140.22	4.20	25.10	127.17	3.20	21.57	128.96
S47	0.96	8.61	122.19	3.39	25.95	117.15	2.86	26.00	114.23
S48	1.48	9.24	147.57	5.50	29.31	133.27	4.24	25.71	132.73
S49	0.96	8.84	122.48	3.54	28.02	115.32	2.66	23.50	116.43
S50	0.47	4.98	118.10	1.65	15.96	113.76	1.31	14.32	113.30

4. CONCLUSION

The groundwater of the study area was very hard and the relative abundance of major cations and anions was Ca2+>Mg2+>Na+>K+ during Winter season, Ca2+> Na+>Mg2+ >K+ during Summer and Rainy Seasons and Cl->HCO3>SO42- during the entire study period respectively. The variables like sodium adsorption ratio (SAR), sodium percentage, and magnesium ratio were calculated from the chemical data. As per the results obtained, SAR and Na% revealed good quality of groundwater for irrigation purposes, whereas, MR values showed that this water is not suitable for agriculture and domestic use. Finally, it is concluded that there is lack of proper monitoring of ground water quality, and a regular chemical analysis and monitoring of ionic composition is required to check the suitability of water for drinking and irrigation purpose.

References

- 1. APHA. 2005. STD methods for examination of water and wastewater 20th edition.
- 2. BIS **1992**. Drinking water specification (First Revision) First reprint Bureau of Indian standards.
- 3. Jerry, A N. **1986**. Basic environmental technology (water supply, waste disposal and pollution control). Wiley, New York.
- Krishna kumar, S., A. Logeshkumaran, N. S. Magesh, Prince S. Godson and N. Chandrasekar. 2015. Hydro-geochemistry and application of water quality index (WQI) for groundwater quality assessment, Anna Nagar, part of Chennai City, Tamil Nadu, India, Appl Water Sci , 2015, 5:335–343.
- 5. Kumar M, Kumari K, Ramanathan AL, Saxena R. A comparative evaluation of groundwater suitability for irrigation and drinking purposes in two intensively cultivated districts of Punjab, India. Environ Geol, **2007**, 53:553–574.
- 6. Kumar M, Kumari K, Singh U K, Ramanathan A L.. Hydrogeo-chemical processes in the groundwater environment of Muktsar, Punjab: conventional graphical and multivariate statistical approach. Environ Geol **2009**, 57:873–884.
- 7. Palliwal, K.V. Irrigation with saline water, ICARI Monograph No.2, New Delhi, **1972**, p 198
- Purushothman P, Rao M S, Kumar B, Rawat Y S, Krishan G, Gupta S, Marwah S, Bhatia A K, Kaushik, Y B, Angurala M P and Singh G P. Drinking and irrigation water quality in Jalandhar and Kapurthala Districts, Punjab, India: using hydrochemistry. IJEE, 2012, 5(6):1599–1608

- 9. Saleh A, Al-Ruwaih F, Shehata M. Hydrogeochemical processes operating within the main aquifers of Kuwait. J Arid Environ, **1999.** 42:195–209
- Sayyed, J A and Bhosle A B. Analysis of Chloride, Sodium and Potassium in groundwater samples of Nanded City in Mahab- harata, India. Eur J Exp Biol, 2011. 1(1):74–82.
- 11. Srinivas Y, Hudson Oliver D, Stanley Raj A and Chandrasekar N. Evaluation of groundwater quality in and around Nagercoil town, Tamil Nadu, India: an integrated geochemical and GIS approach. Appl Water Sci, **2013.** 3:631–651.
- Subramani T, Elango L and Damodarasamy, S R. Groundwater quality and its suitability for drinking and agricultural use in Chithar River Basin, Tamil Nadu, India. Environ Geol 2005, 47:1099–1110.
- 13. Suresh B, Manjappa S and E T Puttaia, 2011. Seasonal Variation in Phytoplankton in Tungabhadra River near Harihar-Karnataka. Research Journal of Biological Sciences, 6, 2 pp.65-68, Medwell Journals.
- Tajinder Kaur, Renu Bhardwaj and Saroj Arora. Assessment of groundwater quality for drinking and irrigation purposes using hydrochemical studies in Malwa region, southwestern part of Punjab, India, Appl Water Sci, 2017, 7, pp. 3301–3316.
- 15. Thakur T, Rishi MS, Naik PK, Sharma P. Elucidating hydrochemical properties of groundwater for drinking and agriculture in parts of Punjab, India. Environ Earth Sci, **2016**, 75:467
- Tiwari K K, Prasad R N, Chandra Ram, Mondal N C. Geochem- ical parameters for assessment of groundwater quality around urban and suburban areas of Dausa city in Rajasthan, India. J Appl Geochem 2012, 14(2):184–193.
- 17. Tripathi AK, Mishra UK, Mishra A, Tiwari S, Dubey P. Studies of hydrogeochemical in groundwater quality around Chakghat Area, Rewa District, Madhya Pradesh, India. Int J Mod Eng Res Technol, **2012**, 2(6):4051–4059.